Перчаточные боксы Plas-Labs (США)

Glove Box Applications

815 PGB Series

MORE

La Petite Glove Box.

818 Series

MORE

Basic Glove Box.

819 Series (Stainless Steel)

MORE

Integrity stainless steel glove box.

820 Series

MORE

Tissue culture hood.

825 Series

MORE

PCR (UV) Chambers

830 Series

MORE

Compact glove boxes.

850 Series

MORE

Nitrogen dry box.

855 Series

MORE

Controlled environment anaerobic chambers.

856-HYPO

MORE

Hypoxia Chamber Glove Box

870 Series

MORE

Closed-Loop bio-containment

Simplicity 888

MORE

Automatic controlled environment anaerobic chamber.

890 Series

MORE

Temperature & humidity controlled.

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

La Petite Glove Box
Ergonomical, Effective, AND Economic!

The La Petite Glove Box is comprised of essentially only two components. The top and bottom are sealed using a revolutionary new gel used in the clean room industry. The unit is only two-thirds the size of our "Basic Glove Box", (818-GB). The 815-PGB is designed to be ergonomically correct for the average person.

815-PGB, La Petite		
I.D.	31.5 w x 25.5 d x 21.5"h	80 x 65 x 55 cm
O.D.*	49 w x 29 d x 22" h	124,5 x 74 x 56 cm
Appx.	Vol. 9.5 cu. ft.	269 L
Appx.	Shipping Weight 75 pounds	35 Kilos

** Includes Transfer Chamber*

815-PGB, La Petite Glove Box

Basic Features

- Lightweight, easy to move from lab to lab.
- Optically clear, one piece formed top is unbreakable.
- Bright white one piece bottom formed out of high temperature Noryl has "easy clean" corners.
- Gel Sealant.
- Stainless steel clamps have security locking features.
- Large access door (12" opening)
- Four ground key-cock valves for purging and gas entry.
- Adjustable Rh gauge.
- "Weathertite" duplex electrical outlet with safety covers.
- Transparent vacuum capable transfer chamber 12" long x 9.75" ID.
- White leveling plate for transferring liquids.
- All stainless steel clamps are adjustable.
- Vacuum gauge on transfer chambers.
- 7" Latex or neoprene gloves available.
- Standard 12 month warranty.

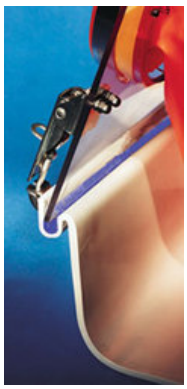

Gel Sealant System

This new gel was developed specifically for the clean room industry. It was first used for secure sealing of the HEPA filter system.

- The gel does not support biological growth.
- It will not "outgas" and is non toxic.
- It contains no silicone which might cause contamination.
- It is an air tight, water tight barrier.
- It is highly adhesive yet quick releasing and self healing.

To replace gel oder 800 blue.

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Basic Glove Box
Clearly your best choice.

Our glove boxes are designed to be just what they are called, "Basic." They are engineered to fit general laboratory isolation applications. They can be easily modified for specific uses.
Units are very handy for isolating sensitive research studies from a hostile exterior environment.
These economical units are compact, portable, lightweight and self-contained.

818-GB

Basic Features for Models 818-GB and 818-GBB

- Optically clear, one piece acrylic top.
- Matched die molded thermoset, bright white bottom (818-GB only).
- Coved, easy to clean corners with no hidden dark spots.
- Double layered, closed cellular neoprene gasketing system.
- Ambidextrous, white Hypalon gloves for superior chemical and U.V. resistance.
- Adjustable vacuum gauge on transfer chamber.
- Four ground key cock valves for purging.
- White leveling tray for transferring liquids through the transfer chamber.
- Stainless steel "0" rings for gloves.
- Transparent transfer chamber 12" long by 11" diameter (I.D.).
- Standard warranty (12 months).
- All clamps fully adjustable to compensate for wear.
- Hospital grade multiple electrical outlet strip U.L.-C.S.A. approved 110-120 volt U.S.A. (220-240 volt export).

818-GBB

Sizes	818-GB	818-GBB
I.D.	41"w x 28"d x 26"h 104cm x 71cm x 66cm	60"w x 38"d x 31"h 152cm x 96.5cm x 79cm
O.D.	55"w x 35"d x 27"h 140cm x 89cm x 68.5cm	76"w x 47"d x 32"h 193cm x 119cm 81cm
Appx. Shipping Weight	200 pounds	250 pounds
Volume	17.3ft 489L	40.9ft 1157L

818-GB shown with additional accessories: 800-Flow (flow meter kit) and 800-PORT (extra glove ports on back of chamber).

Applications

- Pharmaceutical Research Labs
- Bio-Tech Research Facilities
- Animal Science Research
- Clean Room Facilities
- Waste Management Research
- Micro-Electronics Assembly
- Chemical Company Labs
- Industrial/Contract Research
- Plasma Welding Applications
- Universities/Medical Schools
- Biology, Microbiology, Toxicology, Zoology, Pharmacology, Geology

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Integrity Stainless Steel Glove Box

Plas Labs is pleased to offer a new stainless steel glove box which is based upon our thirty rugged glove box is ideal for applications in the field as well as the lab.
Unitized construction provides complete integrity for protection of operators. Samples can be gathered and studied in the field or moved back to your laboratory as needed. Complete integrity is maintained.

819-GB

Product Benefits

- Complete portability from lab to lab.
- Easy to load large bulky equipment.
- Unit does not "out gas".
- Increased chemical resistance of stainless steel
- Units can be "coupled" together for multiple user operations.
- Excellent low humidity characteristics.
- Neutral (non-reactive) environmental work.
- Complete safety for transferring anaerobic field samples.

Basic Features for Models 819-GB

- Safety glass viewing port.
- Rugged (12 Ga.) stainless steel housing.
- Large ten (10"Ã¸) inch diameter glove ports.
- Optically clear transfer chambers for observing.
- Four (4) ground key cock valves for purging.
- Adjustable stainless steel hardware throughout.
- Polycarbonate inner transfer chamber door (no out gassing).
- Total front panel access for large equipment.
- Vacuum gauge and leveling plate with Transfer Chamber.
- Ambidextrous white Hypalon gloves, ten (10"Ã¸) inch diameter.
- Bright white fluorescent light.
- Multiple electric outlet strip (hospital grade). Electrically rated at 115-120 volts, 220-240 volts available.
- Dual (gas piston) lifters on front panel.

819-SS/GB

Sizes	819-GB
I.D.	41"w x 29"l x 27"h 102cm x 74cm x 69cm
O.D.	53"w x 29"l x 27"h 135cm x 74cm x 69cm
Appx. Shipping Weight	250 pounds 112.5 kilos
Volume	17.3ft 489L

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Germicidal Work Station
Clearly your best choice.

Our 820-TCH provides adequate counter top protection when a more sophisticated device is not necessary. It is ideal for many acute studies.
Its modest weight of 60 pounds makes it readily transportable. The main housing unit is formed of one piece clear acrylic and offers total viewing of your project.

820-TCH

Applications

- Animal Necropsy
- Safety Enclosure
- Tissue Culture Processing
- Teaching Demonstration Hood
- Toxicology/Pathology Workstations
- Still Air Hood
- PCR Work

Features for the 820-TCH

- Formed one piece optically clear acrylic .375”thick.
- Fluorescent and U.V. germicidal light package - Special switch prevents both lights from being operated at the same time for operator protection.
- Removable top shroud for easy access when changing bulbs.
- All controls are illuminated and the system is fused for safety.
- Ground key cock valve for circulation of air or gas of choice.
- Standard one year warranty.
- Power requirements 120 Volts 60 Hz. International 220/240 Volts 50 Hz.
- Formed plastic bottom with spill guard.

Draft Control Sash with Iris

820-TCH Dimensions	
I.D. (flange)	44”wide x 29”deep x 20”high 111.8 x 73.7 x 50.8cm
Sash Opening	8.5”high x 27.5”long
Approximate Shipping Weight	110 pounds (50 kilos)

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

PCR UV Chamber

Clearly your best choice.

825-PCR (UVC) Chamber

825-PCR/HEPA

This chamber has been designed to help improve the accuracy of P.C.R.* and general Tissue Culture procedures. The chance for air-borne contamination during D.N.A. sequencing is greatly reduced.
The chamber is a "still air enclosure" which contains both fluorescent and U.V. germicidal lamps. The U.V. system is rated at 254 nm and will decontaminate all surfaces of the interior. The lamp should be activated 15 minutes prior to and 15 minutes after planned use.
The front viewing panel is .500 (13 mm) thick optically clear material. It is extremely effective for protection against 32P labeled compounds. It is very effective against Beta Rays but not Gamma rays. Front plate is replaceable. (catalog # 825-UVC (F5))
Access to the interior of the chamber is gained by pushing the thumb knobs and lifting off the corner doors. The doors are removable therefore do not take up valuable laboratory counter workspace. If a corner door is opened, proximity sensors turn off the power to the U.V. System.

*P.C.R. is covered by U.S. patents owned by Hoffman-La Roche, Inc.

Features for the 825-PCR (UVC) Chamber

- Two bright white acrylic shelves are included (5 x 23) & (7 x 23) one is tooled to store pipettors.
- Front panel is .500 (l3mm) thick for Beta Ray protection (replaceable catalog # 825-UVC (F5)).
- Side access panels are removable and have thumb knobs.
- Proximity sensors turn off the U.V. system for safety when the door is opened.
- Automatic timer
- Domestic electric power requirements are 110-115 Volt, 60 Hz. 220 volt units are available.
- The system has a two (2) Amp circuit breaker.
- Sides and back wall are one piece formed of .375 thick acrylic for long term rigidity, durability, and protection.
- Bottom tray has a formed in place spill tray.
- Main housing and top are removable for installation of large pieces of research equipment.
- The U.V. system is rated at 254 nm.
- Crated weight is 110 lbs. (49.5 Kg)
- Standard one (1) year warranty.

825-PCR (UVC) Chamber - Rearview

825-UVC Dimensions	
O.D.	24”wide x 18”deep x 28”high
I.D.	23.5”high x 17”long x 21”high
Crated Weight	110 lbs. (49.5Kg)

825-PCR (HEPA) Features:

A. Positive pressure external fan (blower). 115-120 Volts.
B. Small H.E.P.A. filter rated at 99.97% efficiency at 0.3 microns.
C. No tools required for filter change over.
D. Low fan noise level. Rated at less than 40 dBA.

INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Compact Glove Box
Four sizes available.

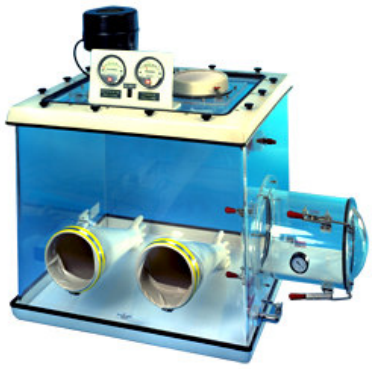

830-ABB w/ 800 HEPA-S
800 HEPA-S Available Options
The 800-HEPA/S, single HEPA filtration system includes one 8" HEPA filter, .4 micron pre-filter, blower, Magnehelic gauge (part number 800-MAGNA), and mounting plates. The glove box operates under a slight negative pressure, the internal atmosphere filters through the HEPA filter, and the replacement air filters through an 8" round pink media filter.

830-ABC
Options for the Compact Glove Box
Vent Outlet
Access Door
Additional Glove Ports
And More!!

More options for compact glove box here. >>

830-ABC minimizes drafts and maximizes effectiveness of your balance. This unit features cleanliness, safety, complete containment, portability, and a draft-free atmosphere.
The Compact Glove Box is designed specifically for use in hazardous situations where materials to be weighed must be contained. The chamber is ideal for determining the dry weight or moisture content of aqueous solutions, adhesives, cereals, toxic chemicals, pharmaceuticals, paper, plastics, and light radioactive materials. It minimizes product degradation caused by moisture absorption. The 830-ABC is beneficial when working with toxic substances, asbestos fibers, sewage residue, and harmful liquid vapors. For use with analytical balances, top loaders, bench scales and/or moisture analyzers. We offer access doors if transfer chambers are not desired.

Basic Features

- Top section is removable for easy installation of equipment.
- Four purging gas valves (two on the transfer chamber and two on the main chamber).
- White leveling tray for easy transferring of liquids.
- All clamps stainless steel and completely adjustable.
- White ambidextrous Hypalon gloves for superior chemical and U.V. resistance.
- Hospital grade multiple electrical outlet strip U.L.-C.S.A. approved.
- Pressure relief valve minimizes glove "fight back".
- H.E.P.A. and organic vapor canister filters (replaceable).
- Standard warranty and manual.
- Transfer chamber is 12" long x 11" diameter (I.D.).

Available Sizes	830-ABC	830-ABB	830-ABD	830-ABE
I.D.	28"w x 23"d x 29"h 71cm x 59cm x 74cm	35"w x 29" d x 30"h 89cm x 74cm x 77cm	48"w x 29"d x 32"h 122cm x 73cm x 81cm	60"w x 29"d x 32"h 1524mm x 740mm x 810mm h
O.D.*	43"w x 24"d x 31"h 110cm x 61cm x 79cm	49"w x 30"d x 31"h 125cm x 77cm x 79cm	63"w x 31"d x 34"h 160cm x 78cm x 86cm	76"w x 32"d x 35"h 1930mm x 812mm x 890mm h
Top Opening	17" x 23" 43cm x 58cm	24" x 29" 61cm x 73cm	24" x 42" 61cm x 106cm	24" x 54" 610mm x 1370mm
Door Opening	15"w x 18"h 38cm x 45cm	21.5"w x 21.5"h 54cm x 54cm	21.5"w x 24"h 54cm x 61cm	21.5"w x 24"h 54cm x 61cm
Volume	11.2 cu. ft. 317L	17.6 cu. ft. 498L	25.8 cu. ft. 730L	32.2 cu. ft. 912L
Approximate Shipping Weight	250 pounds	300 pounds	300 pounds	400 pounds / 182 kilos

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Compact Glove Box
Three sizes available.

Our nitrogen Dry Box is a completely enclosed chamber which is ideal for working in a preferred atmosphere.

Inert gases like Argon, Nitrogen, and Plasma are easily maintained. It is compact, portable, and lightweight. The design makes is easily moveable from lab to lab. Refer to accessories 800 CART-I

Everything you need is included with the unit. All you need is your gas of choice and research or production materials.

850-NB, Nitrogen Dry Box with Shelf I

Basic Features

- Formed one piece clear acrylic top.
- Matched die molded thermoset white bottom.
- Two vacuum pressure pumps, one each for transfer chamber and drying train.
- Drying train includes polycarbonate canisters containing DesiSphereTM.
- All controls are illuminated.
- Bright fluorescent light system.
- White ambidextrous Hypalon gloves.
- Hospital grade multiple electrical outlet strip, U.L.-C.S.A. approved.
- All clamps are adjustable to compensate for wear.
- Power requirements 120 volts 60 Hz (220 volt models available).
- Self-sealing quick disconnects enable the operator to change the drying train without disturbing the internal atmosphere.
- Front sloped viewing panel minimizes glare.
- Adjustable vacuum gauge on transfer chamber.
- Four ground key cock valves for purging.
- Transfer chamber is 12" long x 11" diameter (I.D.).

850-NBB with 800 Shelf II

Available Sizes	850-NB	850-NBB
I.D.	41"w x 28"d x 26"h 104cm x 71cm x 66cm	60"w x 38"d x 31"h 152cm x 97cm x 79cm
O.D.*	55"w x 35"d x 38"h 140cm x 89cm x 97cm	76"w x 47"d x 42"h 193cm x 119cm x 107cm
Volume	17.3 cu. ft. 489 L	40.9 cu. ft. 1158 L
Appx. Shipping Weight	250 pounds	300 pounds

** Includes Transfer Chamber*

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Controlled Atmosphere Chamber
Completely Automatic Anaerobic Chamber also available!

855-AC

855-ACB

Basic Features

• Formed one piece clear acrylic top.	• Self-sealing quick disconnects enable the operator to change the drying train without disturbing the internal atmosphere.
• Matched die molded thermoset white bottom.	• Adjustable vacuum gauge on transfer chamber.
• Two vacuum pressure pumps, one each for transfer chamber and drying train.	• Four ground key cock valves for purging.
• Drying train includes polycarbonate canisters containing DesiSphereTM.	• Inner door on transfer chamber opens automatically when pressures are neutralized between main chamber and transfer chamber.
• All controls are illuminated.	• Transfer chamber is 12" long and 11" diameter (I.D.).
• Bright fluorescent light system.	• Electrical outlet strip; U.L. & C.S.A. approved, hospital grade with four outlets.
• White ambidextrous Hypalon gloves.	• Power requirements 120 Volts 60 Hz.
• All clamps are adjustable to compensate for wear.	• International 220 Volt.

800 Heater

800-DT, Drying Train Package w/ Pump, removes unwanted moisture from internal atmosphere. Includes pump, hose, and three ploycarbonate canisters filled with molecular sieve, (800-DESI).

800-DESI, includes three polycarbonate canisters filled with molecular sieve to remove unwanted moisture from internal atmosphere. Pump not included with 800-DESI. 800-Heater, Programmable Catalyst Heater Functions

The 800-Heater has two primary functions. It reduces trace amounts of oxygen that happen to enter the main chamber and it maintains incubation temperature from ambient to 42Â° C.

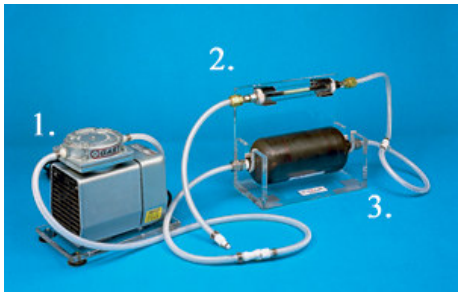

800-ONEG

1. 800-Pump
2. 800-02
3. 800-02R

Ordering both of these should be ordered as the 800-ONEG

Photo shows heater and palladium canister. Sold seperately.

Available Sizes	**855-AC**	**855-ACB**
I.D.	41"w x 28"d x 26"h 104cm x 71cm x 66cm	60"w x 38"d x 31"h 152cm x 97cm x 79cm
O.D.*	55"w x 35"d x 38"h 140cm x 89cm x 97cm	76"w x 47"d x 42"h 193cm x 119cm x 107cm
Volume	17.3 cu. ft. 489 L	40.9 cu. ft. 1157 L
Appx. Ship. Weight	250 pounds 112.5 kilos	300 pounds 135 kilos

** Includes Transfer Chamber*

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Model #856-HYPO, Hypoxia Chamber Glove Box. This new Hypoxia Chamber Glove Box is ideal for tissue culture work, including tumor cell and stem cell research. It features a color operated "touch screen" for automatically controlling oxygen levels, temperature levels, and carbon dioxide levels.

856-HYPO, Hypoxia Chamber Glove Box

Basic Features Include:

- 8" Color Panel Touch Screen.
- O2 Sensor and CO2 sensor
- Platinum RTD with sealing gland
- N2, CO2, and O2 gas hook-up
- Inert gas hook-up
- Ethernet port connection for data logging
- Thermoelectric Assembly (Peltier device)
- Password protected, configurable PID control
- One touch, on-screen datalogging.
- Air circulation fan
- Configurable for up to six individually controlled sampling chambers

856-H Touch Screen Display

Outside Dimensions:	55" wide x 35" deep x 38" high
Inside Dimensions:	41" wide x 28" deep x 26" high
Power Requirements:	115V 10 Amps/60Hz. 230 V 6 Amps/50Hz. (export)
Oxygen (O2) range:	0-25%
Oxygen sensor accuracy:	±0.25%
Carbon Dioxide (CO2) range:	±0-20%C
Carbon Dioxide sensor accuracy:	±0.2%
Temperature range:	ambient to 40° C
Temperature accuracy:	±0.3° C at 0° C (class B accuracy)
Parameter control:	±1% or degree of set point

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Closed Loop Containment Isolator
Biocontainment Level III

The Closed-Loop Containment Isolator is a completely automated negative pressure glove box.

The system is engineered and programmed to maintain a slight negative working pressure (-0.50 in H2O). The internal atmosphere is continually filtered by two HEPA filters. Filters are rated at 99.9997% efficiency.

These isolation units may be coupled together for multiple station work processes. They are large enough for four (4) sets of glove ports (operators).

870-CLC, Closed-Loop Containment Isolator		
I.D.	56"w x 35"d x 27"h	142 x 89 x 69 cm
O.D.*	82"w x 47"d x 53"h	208 x 119 x 135 cm
Appx. Vol.	40.0 cu. ft.	1157 Liters
Appx. Ship. Weight	300 pounds	135 Kilos

870-CLC, Closed-Loop Containment Isolator

Basic Features

- Effective containment / isolation of potentially hazardous toxins, organisms, etc.
- Completely sealed system with automatic negative pressure control.
- Large, easy to read control panel with digital controllers and LED status lights.
- Inlet / outlet HEPA filtration.
- Easy to clean, highly radiused corners.
- Clear acrylic construction will not cause unwanted shadows.
- Fluorescent light offers a well lit, bright working environment.
- Manual house exhaust valve for rapidly venting the isolator.
- Two pairs of glove ports for multiple operators.
- Ambidextrous, white Hypalon gloves.
- Plas-Labs quality customer service.
- Stainless steel support cart with gas tank support tracks.

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Automatic Anaerobic Chamber
Clearly your best choice.

This chamber is designed for automatic atmosphere control when working with oxygen sensitive materials, product containment, and/or general isolation control.

This chamber features an internal PC with multifunctional operator interface. It is perfect for working under anaerobic conditions.

SIMPLICITY 888

Basic Features

• Internal PC with multi-functional operator interface.	• CE Approved electrical outlet strip.
• Three Drying Train canisters with quick dis-connects.	• White ambidextrous Hypalon gloves.
• Programmable Catalyst Heater Unit.	• Two ground key-cock valves on main chamber.
• Fluorescent Light.	• Two 1/4" NPT gas connections.
• Transfer chamber (12" long x 11" I.D.)	• Standard 12 month warranty.

Close-up of Interface

Available Sizes	Simplicity 888
I.D.	41"w x 28"d x 26"h 104cm x 71cm x 66cm
O.D.*	55"w x 35"d x 38"h 140cm x 89cm x 97cm
Volume	17.3 cu. ft. 489 L
Appx. Ship. Weight	250 pounds 112.5 kilos
Maximum Working Pressure	6" H2O .44 In. of Hg.

** Includes Transfer Chamber*

800-HEATER with 800-PC (included with Simplicity 888

800-DT, Drying Train Package w/ Pump, removes unwanted moisture from internal atmosphere. Includes pump, hose, and three ploycarbonate canisters filled with molecular sieve, (800-DESI).

800-DESI, includes three polycarbonate canisters filled with molecular sieve to remove unwanted moisture from internal atmosphere. *Pump not included* with 800-DESI.

Picture includes 800-Heater and 800-PC, palladium canister. Both are included in the Anaerobic Chambers.

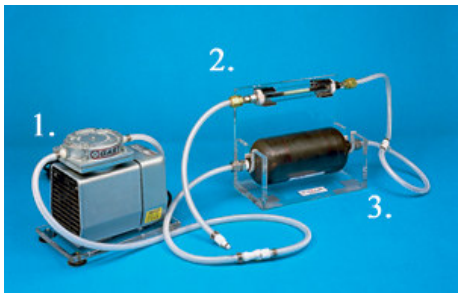

800-ONEG

1. 800-Pump
2. 800-02
3. 800-02R

Ordering both of these should be ordered as the 800-ONEG

Available Sizes	Simplicity 888
I.D.	41"w x 28"d x 26"h 104cm x 71cm x 66cm
O.D.*	55"w x 35"d x 38"h 140cm x 89cm x 97cm
Volume	17.3 cu. ft. 489 L
Appx. Ship. Weight	250 pounds 112.5 kilos
Maximum Working Pressure	6" H2O .44 In. of Hg.

** Includes Transfer Chamber*

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com

Temperature & Humidity Controlled Glove Box
With large color TOUCH SCREEN display!

The 890-THC accurately maintains temperature and humidity (Rh) inside a roomy, single station glove box.

Unit includes: vacuum capable transfer chamber, one piece Hypalon gloves, large color touch screen operator display, inert gas hook-up, internal 110V power, serial connection for datalogging, and optional drying train package.

890-THC, Temperature & Humidity Controlled Glove Box

Basic Features

- 8" Color Panel Touch Screen.
- Humidity (Rh) transmitter with 8' sensor cable.
- Platinum RTD with sealing gland.
- Inert gas hook-up.
- Main chamber formed of one piece clear acrylic material.
- Two inlet/outlet gas valves on main chamber and transfer chamber.
- Serial port connection for datalogging.
- Four Preset Conditions.
- Thermoelectric Assembly (Peltier device).
- Password protected, configurable PID control.
- One touch, on-screen datalogging.
- Nebulizer.
- Two Drying Train Canisters (filled with Molecular Sieve) and circulation pump (optional).

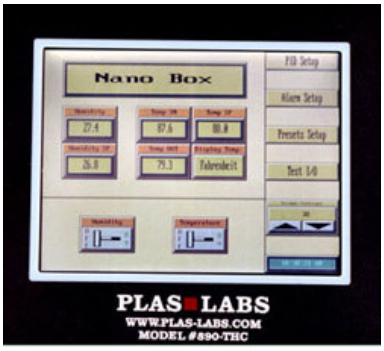

890-THC Touch Screen Display

Touch Screen Display Features:

- East to use, single touch display screen.
- Password Protection.
- Four Preset Conditions.
- On Screen Temperature and Humidity readings; Set points and actual chamber readings.
- Full Color screen.
- Date and time display.
- Contrast adjustability.
- Room temperature and humidity readings.

Optional Drying Train Package:
The Drying Train Package includes two (2) canisters filled with Molecular Sieve and circulation pump. The Drying Train Package can be used if a house supply of inert gas is not available. Periodic regeneration of the molecular sieve is recommended for optimal drying performance.

Optional Anaerobic Conditions:
The 890-THC can be equipped as an Anaerobic Chamber. Simply ad the Plas-Labs' digital catalyst heater unit, (800-HEATER and 800-PC).

Outside Dimensions:	55" wide x 35" deep x 38" high	Temperature Range:	16-44° C
Inside Dimensions:	41" wide x 28" deep x 26" high	Temperature Sensor:	±0.3° C
Power Requirements:	115V 10 Amps/60Hz. 230 V 6 Amps/50Hz. (export)	Control Accuracy: Resolution:	±1° 0.1° C
On Screen Datalogging:	24 hour event	Humidity Range:	1-80% Rh
Alarms:	Four (4) selectable High/Low alarms	Humidity Sensor:	±2% Rh
Serial Connection:	DB15	Control Accuracy:	±1% Rh
Serial Connection:	20 LPM	Resolution:	0.1% Rh

INTRADE
INTERNATIONAL SCIENTIFIC TRADING THE COMPANIES GROUP

107045, Россия, Москва,
Костянский пер, д.11,
Тел/факс: (495) 661-24-54
www.istcgroup.com
www.plas-labs.ru
info@istcgroup.com